



SF TOOLS™

SHRINKFAST 60

SHRINKFAST 60™

BRING THE POWER OF DIRECT HEAT HOME

Originally known as the Shrinkfast MZ, the Shrinkfast 60™ is one of the first direct heat tools designed for DIY use. With a lightweight body and less intimidating flame, it's the ideal direct heat tool for a wide range of at-home and small business applications. Everything from protecting patio furniture, pleasure boats and outdoor equipment to herbicide-free weed removal.

Proudly designed and manufactured in the U.S.A.



DESIGNED FOR SAFETY

- UL, ULC and CE Safety Certified
- "Dead-man" trigger automatically shuts off propane flow and extinguishes flame when released
- The combustor remains cool to the touch during operation
- Patented Ignition System allows for reliable firing of the heat tool every time
- UL-approved regulator assembly features an "Excess Flow Device" that stops the flow of propane if the hose is cut
- Tested for peak performance and safety before shipping

POWERFUL & PRECISE

- Generates 60,000 BTUs of power
- Wraps standard 40" x 48" x 60" pallets in less than 3 minutes
- Fan-shaped combustor creates an even, steady fan pattern for consistent heat distribution
- Adjustable BTU output for a variety of applications

LIGHTWEIGHT & DURABLE

- Lightweight design (1.75 lbs) for easy maneuverability
- Combines durable exposed aluminum die-cast body with comfortable ergonomic grip
- Heavy duty UL-approved 25' hose withstands up to 300 lbs of pressure
- One-year manufacturer's warranty on parts and labor
- Full-service repair facility located in Newport, New Hampshire

VERSATILE & EASY TO USE

- Designed for quick, easy assembly – operational in less than 5 minutes
- Easy-to-install 3-foot extension available for hard-to-reach areas and larger objects
- SF Tools™ offers several personal protective equipment (PPE) accessories
- Contact SF Tools™ directly if you have questions

SHRINKFAST 60™

POWER AT 27 PSI	75,000 BTUs
TOOL WEIGHT	1 lb 12 oz
TOOL LENGTH	13.5"
COMPLETE KIT WEIGHT	11 lbs
RATED CAPACITY @ 27 PSI	22 KW
RECOMMENDED PRESSURE RANGE	20 - 30 PSI
TEMPERATURE - 6" FROM FLAME	970° F
FUEL CONSUMPTION (LBS/HR)	3.5 lbs / hour
AIR CONSUMPTION	12.36 CFM
CO2 EMISSION	1.7% CO2
CO EMISSION	89 PPM CO
NOISE LEVEL	80 dbA
ENERGY SOURCE	Propane Only
UL, ULC & CE CERTIFIED	Yes
MADE IN THE U.S.A.	Manufactured in Newport, NH

TURN UP THE HEAT ON YOUR TO-DO LIST



PROTECTION & STORAGE

Wrap home and small business assets for seasonal storage.



MARINE & RECREATION

Protect boats, trailers, RVs and other gear with confidence.




PROPERTY MAINTENANCE

Winterize A/C units, outdoor kitchens and more.

ACCESSORIES

SF Tools™ are designed for versatility. Outfit your heat tool with professional-grade accessories made to optimize performance for a variety of tasks.

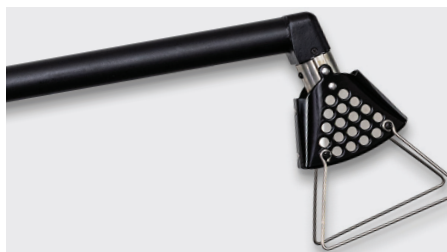

3 FT EXTENSION TUBE



SAFETY GLOVES